




OutBack Indoor/Outdoor
Speakers

OB-4.1 / OB-5.1 / OB-6.1 / OB-Solo
Instruction Manual

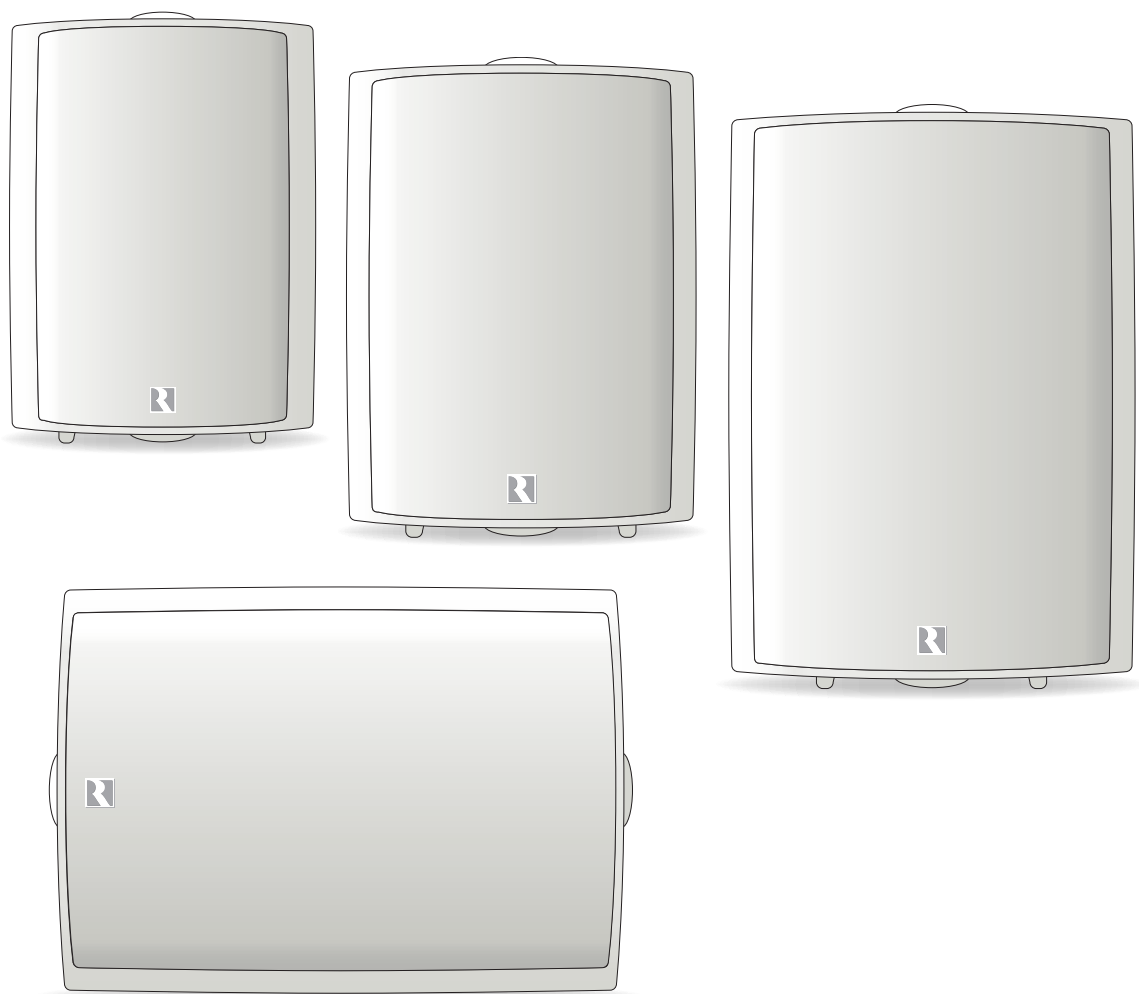

ALL WEATHER DESIGN

The OutBack Speakers from Russound have the features that a true outdoor speaker requires. From rain to snow, saltwater to the sun's harmful UV rays, OutBack speakers are meant to be placed OutBack with the worst Mother Nature can dish out! Along with the gold-plated binding posts, solid brass and stainless steel hardware and rust-proof aluminum grille the resonance-free, mineral filled composite cabinet can withstand extreme temperature fluctuations from -50F to 200F. OutBack speakers were created with harsh environments in mind.

CONNECTING YOUR SPEAKERS

The gold-plated binding posts on the OutBack speakers are color-coded for polarity; red is positive and black is negative. The binding posts are designed to accept either bare wire or "Banana Plugs." Turn off the amplifier prior to making connections to avoid possible damage from accidental speaker wire shorting. Make sure that all connections are tight and there is no shorting of wires from one terminal to another. Check that the polarity is correct on both speakers, otherwise bass response and imaging will suffer from cancellation.

CONNECTING YOUR OB-SOLO

Attach each pair of wires to the red and black speaker terminals. Press down on the gold plated binding post and insert the wire into the hole. Release binding post. Make sure that no stray strands of wire have gotten detached and are touching the other main wire.

MOUNTING



DO NOT mount the speaker with the front facing up as water can directly enter the cabinet through the port opening.

Mounting Using Standard Bracket (included):



The OutBack speakers are equipped with mounting brackets that will allow either vertical or horizontal mounting. The brackets should be mounted using a level to assure correct positioning. Always make sure that the mounting surface and fasteners will support the speaker safely. Connect the speaker wiring to the speaker, assuring correct polarity. Secure the speaker to the bracket using the supplied knobs. Adjust the speaker for optimum sound. Hand-tighten the knobs only! Use of power tools can cause damage to the threaded inserts, causing them to break free of the cabinet.

Mounting Using Aftermarket Bracket:

Dual 1/4-20 brass inserts are for use with various aftermarket mounting systems. Follow directions included with aftermarket product.

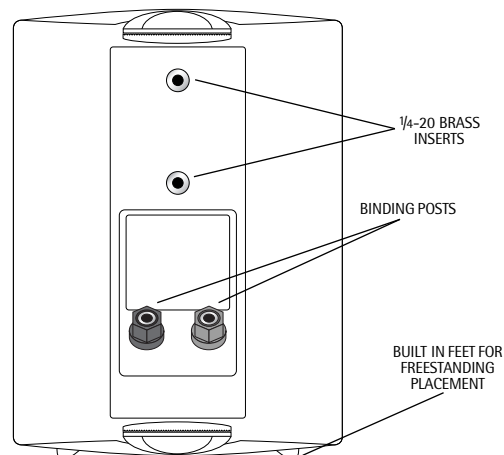

OB-SOLO
BINDING POSTS

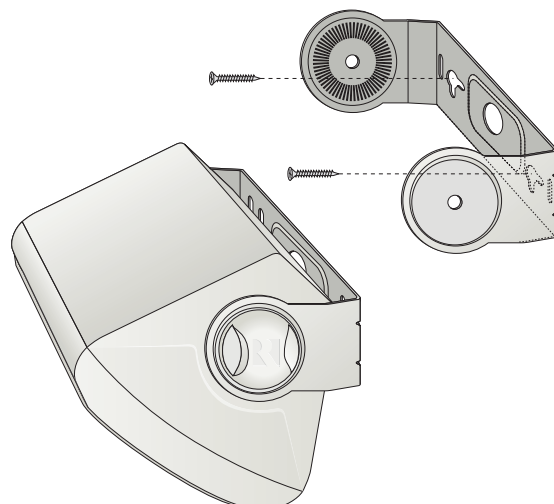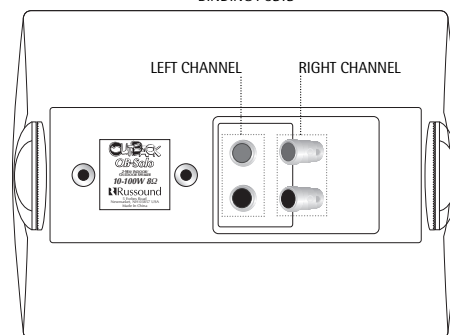

SPECIFICATIONS

	OB-4.1	OB-5.1	OB-6.1	OB-Solo
Woofer:	4" Long Throw	5" Long Throw	6" Long Throw	5" Long Throw
Tweeter:	1/2" Polyamide	3/4" Mylar/Titanium	1" Mylar/Titanium	Dual 3/4" Mylar/Titanium
Amplifier Power:	10 - 75 watts	10 - 100 watts	10 - 150 watts	10 - 100 watts
Frequency Response:	80 - 20kHz	65 - 20kHz	55 - 20kHz	65 - 20kHz
Sensitivity:	87dB	89dB	90dB	89dB
Nominal Impedance:	8 Ω	8 Ω	8 Ω	8 Ω
Dimensions:	8 5/8"H x 6 3/4"W x 5 7/8"D	9 5/8"H x 7 1/4"W x 6 1/2"D	11 7/8"H x 8 1/2"W x 7 1/2"D	11 7/8"H x 8 1/2"W x 7 1/2"D
Weight Each:	4 lb 9 oz	5 lbs 1 oz	7 lbs 3 oz	6 lbs 8.5 oz

WARRANTY

All Russound OutBack Speaker products are fully guaranteed against all defects in materials and workmanship for five years from date of purchase. Proof of Receipt must accompany all claims. During the warranty period Russound will replace any defective part and correct any defect in workmanship without charge for either parts or labor. For this warranty to apply, the unit must be installed and used according to its written instructions. If necessary, repairs must be performed by Russound. The unit must be returned to Russound at the owner's expense and with prior written permission. Accidental damage and shipping damage are not considered defects, nor is damage resulting from abuse or from servicing performed by an agency or person not specifically authorized in writing by Russound. Damage to or destruction of components due to application of excessive power voids the warranty on those parts. In these cases repairs will be made on the basis of the retail value of the parts and labor. To return for repairs, the unit must be shipped to Russound at the owner's expense, along with a note explaining the nature of service required. Be sure to pack in a corrugated container with at least 3 inches of resilient material to protect the unit from damage in transit. Russound sells product only through authorized Dealers and Distributors to ensure that customers obtain proper support and service. Any Russound product purchased from an unauthorized dealer or other source, including retailers, mail order sellers and online sellers will not be honored or serviced under existing Russound warranty policy. Any sale of products by an unauthorized source or other manner not authorized by Russound shall void the warranty on the applicable product.



OB-4.1



OB-5.1



OB-6.1



OB-Solo

Specifications subject to change without notice. IntelliNet Controls is not responsible for any typographical errors. E.O.E.



5 Forbes Rd. Newmarket, NH 03857, USA
☎ 603.659.5170 • Fax 603.659.5388
e-mail: tech@russound.com

the right
connection

Come visit us at:

www.russound.com